

# Brocade 5600 vRouter RIPng Configuration Guide

Supporting Brocade 5600 vRouter 4.2R1

© 2016, Brocade Communications Systems, Inc. All Rights Reserved.

Brocade, Brocade Assurance, the B-wing symbol, ClearLink, DCX, Fabric OS, HyperEdge, ICX, MLX, MyBrocade, OpenScript, VCS, VDX, Vplane, and Vyatta are registered trademarks, and Fabric Vision is a trademark of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned may be trademarks of others.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.

The authors and Brocade Communications Systems, Inc. assume no liability or responsibility to any person or entity with respect to the accuracy of this document or any loss, cost, liability, or damages arising from the information contained herein or the computer programs that accompany it.

The product described by this document may contain open source software covered by the GNU General Public License or other open source license agreements. To find out which open source software is included in Brocade products, view the licensing terms applicable to the open source software, and obtain a copy of the programming source code, please visit <http://www.brocade.com/support/oscd>.

# Contents

---

<b>Preface</b> .....	<b>5</b>
Document conventions.....	5
Text formatting conventions.....	5
Command syntax conventions.....	5
Notes, cautions, and warnings.....	6
Brocade resources.....	6
Contacting Brocade Technical Support.....	6
Brocade customers.....	6
Brocade OEM customers.....	7
Document feedback.....	7
<b>About This Guide</b> .....	<b>9</b>
<b>RIPng Configuration</b> .....	<b>11</b>
RIPng overview.....	11
Supported standards.....	11
Configuring RIPng.....	11
Enabling forwarding on R1 and R2.....	12
Enabling RIPng on an interface.....	12
Advertising connected networks.....	13
Confirming visibility of remote networks.....	14
<b>Router-Level Configuration Commands</b> .....	<b>17</b>
monitor protocol ripng disable events.....	18
monitor protocol ripng disable packet.....	19
monitor protocol ripng disable rib.....	20
monitor protocol ripng enable events.....	21
monitor protocol ripng enable packet.....	22
monitor protocol ripng enable rib.....	23
show monitoring protocols ripng.....	24
protocols ripng aggregate-address <ipv6net>.....	25
protocols ripng default-information originate.....	26
protocols ripng default-metric <metric>.....	27
protocols ripng log.....	28
protocols ripng log packet.....	30
protocols ripng passive-interface <interface-name>.....	31
protocols ripng route <ipv6net>.....	32
protocols ripng timers garbage-collection <seconds>.....	33
protocols ripng timers timeout <seconds>.....	34
protocols ripng timers update <seconds>.....	35
reset ipv6 ripng route.....	36
show ipv6 route ripng.....	37
show ipv6 ripng.....	38
<b>Route Redistribution Commands</b> .....	<b>41</b>
protocols ripng redistribute bgp.....	42
protocols ripng redistribute connected.....	43
protocols ripng redistribute kernel.....	44

protocols ripng redistribute ospfv3.....	45
protocols ripng redistribute static.....	46
<b>Route Filtering Commands.....</b>	<b>47</b>
protocols ripng distribute-list access-list.....	48
protocols ripng distribute-list interface <interface-name> access-list.....	49
protocols ripng distribute-list interface <interface-name> prefix-list.....	50
protocols ripng distribute-list prefix-list.....	51
<b>RIPng Interface Commands.....</b>	<b>53</b>
interfaces <interface> ipv6 ripng enable.....	54
interfaces <interface> ipv6 ripng metric-offset.....	55
interfaces <interface> ipv6 ripng split-horizon.....	56
interfaces <interface> ipv6 ripng neighbor <ip-address>.....	58
<b>Supported Interface Types.....</b>	<b>59</b>
<b>List of Acronyms.....</b>	<b>61</b>

# Preface

---

- Document conventions..... 5
- Brocade resources..... 6
- Contacting Brocade Technical Support..... 6
- Document feedback..... 7

## Document conventions

The document conventions describe text formatting conventions, command syntax conventions, and important notice formats used in Brocade technical documentation.

## Text formatting conventions

Text formatting conventions such as boldface, italic, or Courier font may be used in the flow of the text to highlight specific words or phrases.

Format	Description
<b>bold text</b>	Identifies command names Identifies keywords and operands Identifies the names of user-manipulated GUI elements
<i>italic text</i>	Identifies text to enter at the GUI Identifies emphasis Identifies variables
Courier font	Identifies document titles Identifies CLI output Identifies command syntax examples

## Command syntax conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

Convention	Description
<b>bold text</b>	Identifies command names, keywords, and command options.
<i>italic text</i>	Identifies a variable.
value	In Fibre Channel products, a fixed value provided as input to a command option is printed in plain text, for example, <b>--show</b> WWN.
[ ]	Syntax components displayed within square brackets are optional.
{ x   y   z }	Default responses to system prompts are enclosed in square brackets. A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x   y	In Fibre Channel products, square brackets may be used instead for this purpose. A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, for example, passwords, are enclosed in angle brackets.

Convention	Description
...	Repeat the previous element, for example, <i>member{member...}</i> .
\	Indicates a "soft" line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

## Notes, cautions, and warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

### NOTE

A Note provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

### ATTENTION

An Attention statement indicates a stronger note, for example, to alert you when traffic might be interrupted or the device might reboot.



### CAUTION

A Caution statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.



### DANGER

*A Danger statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.*

## Brocade resources

Visit the Brocade website to locate related documentation for your product and additional Brocade resources.

You can download additional publications supporting your product at [www.brocade.com](http://www.brocade.com). Select the Brocade Products tab to locate your product, then click the Brocade product name or image to open the individual product page. The user manuals are available in the resources module at the bottom of the page under the Documentation category.

To get up-to-the-minute information on Brocade products and resources, go to [MyBrocade](http://MyBrocade). You can register at no cost to obtain a user ID and password.

Release notes are available on [MyBrocade](http://MyBrocade) under Product Downloads.

White papers, online demonstrations, and data sheets are available through the [Brocade website](http://Brocade website).

## Contacting Brocade Technical Support

As a Brocade customer, you can contact Brocade Technical Support 24x7 online, by telephone, or by e-mail. Brocade OEM customers contact their OEM/Solutions provider.

## Brocade customers

For product support information and the latest information on contacting the Technical Assistance Center, go to <http://www.brocade.com/services-support/index.html>.

If you have purchased Brocade product support directly from Brocade, use one of the following methods to contact the Brocade Technical Assistance Center 24x7.

Online	Telephone	E-mail
Preferred method of contact for non-urgent issues: <ul style="list-style-type: none"> <li>• <a href="#">My Cases</a> through MyBrocade</li> <li>• <a href="#">Software downloads</a> and licensing tools</li> <li>• <a href="#">Knowledge Base</a></li> </ul>	Required for Sev 1-Critical and Sev 2-High issues: <ul style="list-style-type: none"> <li>• Continental US: 1-800-752-8061</li> <li>• Europe, Middle East, Africa, and Asia Pacific: +800-AT FIBREE (+800 28 34 27 33)</li> <li>• For areas unable to access toll free number: +1-408-333-6061</li> <li>• <a href="#">Toll-free numbers</a> are available in many countries.</li> </ul>	<a href="mailto:support@brocade.com">support@brocade.com</a> Please include: <ul style="list-style-type: none"> <li>• Problem summary</li> <li>• Serial number</li> <li>• Installation details</li> <li>• Environment description</li> </ul>

## Brocade OEM customers

If you have purchased Brocade product support from a Brocade OEM/Solution Provider, contact your OEM/Solution Provider for all of your product support needs.

- OEM/Solution Providers are trained and certified by Brocade to support Brocade® products.
- Brocade provides backline support for issues that cannot be resolved by the OEM/Solution Provider.
- Brocade Supplemental Support augments your existing OEM support contract, providing direct access to Brocade expertise. For more information, contact Brocade or your OEM.
- For questions regarding service levels and response times, contact your OEM/Solution Provider.

## Document feedback

To send feedback and report errors in the documentation you can use the feedback form posted with the document or you can e-mail the documentation team.

Quality is our first concern at Brocade and we have made every effort to ensure the accuracy and completeness of this document. However, if you find an error or an omission, or you think that a topic needs further development, we want to hear from you. You can provide feedback in two ways:

- Through the online feedback form in the HTML documents posted on [www.brocade.com](http://www.brocade.com).
- By sending your feedback to [documentation@brocade.com](mailto:documentation@brocade.com).

Provide the publication title, part number, and as much detail as possible, including the topic heading and page number if applicable, as well as your suggestions for improvement.





# About This Guide

---

This guide describes how to configure Routing Information Protocol next generation (RIPng) on the Brocade 5600 vRouter (referred to as a virtual router, vRouter, or router in the guide).



# RIPng Configuration

---

- [RIPng overview.....](#) 11
- [Supported standards.....](#) 11
- [Configuring RIPng.....](#) 11

## RIPng overview

RIPng is a dynamic routing protocol that is suitable for small, homogenous IPv6 networks. It is classified as an interior gateway protocol (IGP) and employs the distance-vector routing algorithm. RIPng determines the best path by counting the hops to the destination. The maximum hop count is 15 (16 is considered an infinite distance), making RIPng less suitable for large networks. RIPng is an extension of RIP version 2 for IPv6.

## Supported standards

The Brocade vRouter implementation of RIPng complies with the following standards:

- RFC 2080: RIPng for IPv6
- RFC 2081: RIPng Protocol Applicability Statement


## Configuring RIPng

This section presents the following topics:

- Enable forwarding on R1 and R2
- Enable RIPng on an interface
- Advertise connected networks
- Confirm visibility of remote networks

This section presents an example configuration of RIPng. The configuration example is based on the reference diagram in the following figure. This example shows the configuration of the nodes by using dynamic IPv6 routing with RIPng to enable R3 and R4 to communicate through R1 and R2.

FIGURE 1 Dynamic IPv6 routing example in RIPng

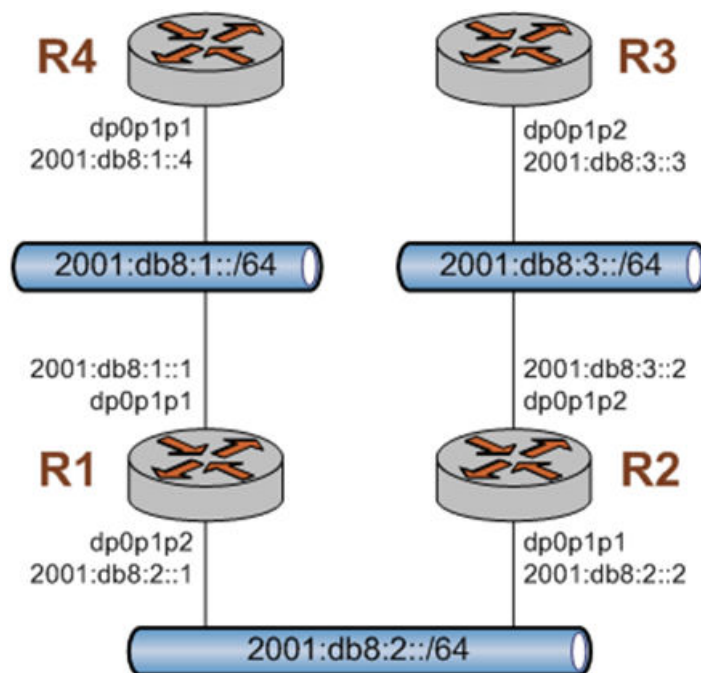

## Enabling forwarding on R1 and R2

For R1 to pass data between the dp0p1p1 and dp0p1p2 interfaces and R2 to pass data between the dp0p1p1 and dp0p1p2 interfaces, R1 and R2 must be configured to enable forwarding. To enable forwarding on R1, perform the following step in configuration mode.

TABLE 1 Enabling forwarding on R1

Step	Command
Enable forwarding on R1.	<code>vyatta@R1# delete system ipv6 disable-forwarding</code>
Commit the change.	<code>vyatta@R1# commit</code>

To enable forwarding on R2, perform the following steps in configuration mode.

Step	Command
Enable forwarding on R2.	<code>vyatta@R2# delete system ipv6 disable-forwarding</code>
Commit the change.	<code>vyatta@R2# commit</code>

## Enabling RIPng on an interface

To allow dynamic routing by using RIPng, RIPng must be enabled on the interfaces that are to use it. To enable RIPng on R1, perform the following steps in configuration mode.

TABLE 2 Enable RIPng on R1

Step	Command
Enable RIPng on dp0p1p1.	vyatta@R1# set interfaces dataplane dp0p1p1 ipv6 ripng enable
Enable RIPng on dp0p1p3.	vyatta@R1# set interfaces dataplane dp0p1p3 ipv6 ripng enable
Commit the change.	vyatta@R1# commit
Change to operational mode.	vyatta@R1# exit vyatta@R1:~\$
Verify the status of RIPng.	vyatta@R1:~\$ show ipv6 ripng status Routing Protocol is "RIPng" Sending updates every 30 seconds with +/-50%, next due in 4 seconds Timeout after 180 seconds, garbage collect after 120 seconds Outgoing update filter list for all interface is not set Incoming update filter list for all interface is not set Default redistribution metric is 1 Redistributing: Interface dp0p1p1 dp0p1p2
Display information for RIPng interfaces.	vyatta@R1:~\$ show ipv6 ripng interface dp0p1p1 is up, line protocol is up Routing Protocol: RIPng Passive interface: Disabled Split horizon: Enabled with Poisoned Reversed IPv6 interface address: fe80::5054:ff:fe8b:1/64 dp0p1p2 is up, line protocol is up Routing Protocol: RIPng Passive interface: Disabled Split horizon: Enabled with Poisoned Reversed IPv6 interface address: fe80::5054:ff:fe98:2/64

## Advertising connected networks

The **redistribute** command is then used to advertise the connected networks. To advertise connected networks on R1, perform the following steps in configuration mode.

TABLE 3 Advertising connected networks on R1

Step	Command
Advertise connected networks through RIPng.	vyatta@R1# set protocols ripng redistribute connected
Commit the change.	vyatta@R1# commit

**TABLE 3** Advertising connected networks on R1 (continued)

Step	Command
Verify the redistribution.	<pre>vyatta@R1:~\$ show ipv6 ripng status Routing Protocol is "RIPng" Sending updates every 30 seconds with +/-50%, next due in 4 seconds Timeout after 180 seconds, garbage collect after 120 seconds Outgoing update filter list for all interface is not set Incoming update filter list for all interface is not set Default redistribution metric is 1 Redistributing: connected Interface dp0plp1 dp0plp2</pre>

## Confirming visibility of remote networks

After enabling RIPng on the other interfaces of R2, R3, and R4 and advertising connected networks on R2, check the routing table of R4 to verify that it has learned the network. To confirm visibility of remote networks on R4, perform the following step in operational mode.

**TABLE 4** Confirming visibility of remote networks on R4

Step	Command
Trace the route from R2 to R4.	<pre>vyatta@R4:~\$ show ipv6 route IPv6 Routing Table Codes: K - kernel route, C - connected, S - static, R - RIP, O - OSPF, IA - OSPF inter area, E1 - OSPF external type 1, E2 - OSPF external type 2, I - IS-IS, B - BGP &gt; - selected route, * - FIB route, p - stale info Timers: Uptime S&gt;* ::/0 [1/0] via 2001:db8:1::1, dp0s1 C&gt;* ::1/128 is directly connected, lo R&gt;* 2001:db8:1::/64 is directly connected, dp0s1 R&gt;* 2001:db8:2::/64 [120/2] via fe80::20c: 29ff:fed6:816c, dp0s1, 00:43:00 R&gt;* 2001:db8:3::/64 [120/3] via fe80::20c: 29ff:fed6:816c, dp0s1, 00:00:03 C&gt;* fe80::/64 is directly connected, dp0s1</pre>

The R in the first column indicates that two routes have been learned from RIPng. Because a route now exists for 2001:db8:3::/64, R3 can be pinged. To confirm connectivity, perform the following steps in operational mode.

**TABLE 5** Confirming connectivity between R4 and R3

Step	Command
Ping R3 from R4.	<pre>vyatta@R4:~\$ ping 2001:db8:3::3 PING 2001:db8:3::3(2001:db8:3::3) 56 data bytes 64 bytes from 2001:db8:3::3: icmp_seq=1 ttl=62 time=5.98 ms 64 bytes from 2001:db8:3::3: icmp_seq=2 ttl=62 time=0.603 ms</pre>

TABLE 5 Confirming connectivity between R4 and R3 (continued)

Step	Command
	<pre>^C --- 2001:db8:3::3 ping statistics --- 2 packets transmitted, 2 received, 0% packet loss, time 1011ms rtt min/avg/max/mdev = 0.603/3.294/5.986/2.692 ms</pre>
Display the RIPng status.	<pre>vyatta@R4:~\$ show ipv6 ripng Codes: R - RIP, Rc - RIP connected, Rs - RIP static, Ra - RIP aggregated,       Rcx - RIP connect suppressed, Rsx - RIP static suppressed,       K - Kernel, C - Connected, S - Static, O - OSPF, I - IS-IS, B - BGP   Network                Next Hop                If      Met Tag  Time C 2001:db8:1::/64        ::                        dp0p1p1  1 0 R 2001:db8:2::/64        2001:db8:1::1 dp0p1p1  1  0 R 2001:db8:3::/64        2001:db8:1::1 dp0p1p1  1  0</pre>





# Router-Level Configuration Commands

---

• monitor protocol ripng disable events.....	18
• monitor protocol ripng disable packet.....	19
• monitor protocol ripng disable rib.....	20
• monitor protocol ripng enable events.....	21
• monitor protocol ripng enable packet.....	22
• monitor protocol ripng enable rib.....	23
• show monitoring protocols ripng.....	24
• protocols ripng aggregate-address <ipv6net>.....	25
• protocols ripng default-information originate.....	26
• protocols ripng default-metric <metric>.....	27
• protocols ripng log.....	28
• protocols ripng log packet.....	30
• protocols ripng passive-interface <interface-name>.....	31
• protocols ripng route <ipv6net>.....	32
• protocols ripng timers garbage-collection <seconds>.....	33
• protocols ripng timers timeout <seconds>.....	34
• protocols ripng timers update <seconds>.....	35
• reset ipv6 ripng route.....	36
• show ipv6 route ripng.....	37
• show ipv6 ripng.....	38

## monitor protocol ripng disable events

Disables the generation of debug messages that are related to RIPng events.

### Syntax

```
monitor protocol ripng disable events
```

### Modes

Operational mode

### Usage Guidelines

Use this command to disable the generation of debug (trace-level) messages that are related to RIPng events.

## monitor protocol ripng disable packet

Disables the generation of debug messages that are related to all RIPng packet types.

### Syntax

```
monitor protocol ripng disable packet [ recv | send ]
```

### Parameters

**recv**

Disables debugging of all received packets.

**send**

Disables debugging of all sent packets.

### Modes

Operational mode

### Usage Guidelines

Use this command to disable the generation of debug (trace-level) messages that are related to RIPng packet types.

## monitor protocol ripng disable rib

Disables the generation of debug messages that are related to the RIPng RIB.

### Syntax

```
monitor protocol ripng disable rib
```

### Command Default

Debug messages are disabled for actions that are related to the RIPng RIB.

### Modes

Operational mode

### Usage Guidelines

Use this command to disable the generation of debug (trace-level) messages that are related to the RIPng RIB.

## monitor protocol ripng enable events

Enables the generation of debug messages that are related to RIPng events.

### Syntax

```
monitor protocol ripng enable events
```

### Modes

Operational mode

### Usage Guidelines

Use this command to enable the generation of debug (trace-level) messages that are related to RIPng events.

## monitor protocol ripng enable packet

Enables the generation of debug messages that are related to all RIPng packet types.

### Syntax

```
monitor protocol ripng enable packet [ recv | send ]
```

### Parameters

**recv**

Enables debugging of all received packets.

**send**

Enables debugging of all sent packets.

### Modes

Operational mode

### Usage Guidelines

Use this command to enable the generation of debug (trace-level) messages that are related to all RIPng packet types.

## monitor protocol ripng enable rib

Enables the generation of debug messages that are related to the RIPng RIB.

### Syntax

```
monitor protocol ripng enable rib
```

### Command Default

Debug messages are generated for actions that are related to the RIPng RIB.

### Modes

Operational mode

### Usage Guidelines

Use this command to enable the generation of debug (trace-level) messages that are related to the RIPng RIB.

## show monitoring protocols ripng

Displays RIPng protocol debugging flags.

### Syntax

```
show monitoring protocols ripng
```

### Modes

Operational mode

### Usage Guidelines

Use this command to display how debugging is set for RIPng.



## protocols ripng aggregate-address <ipv6net>

Specifies an aggregate RIPng route announcement.

### Syntax

**set** protocols ripng aggregate-address *ipv6net*

**delete** protocols ripng aggregate-address *ipv6net*

**show** protocols ripng aggregate-address [*ipv6net*]

### Parameters

*ipv6net*

An IPv6 network from which routes are to aggregate. The format is *ipv6-address/prefix*.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    aggregate-address ipv6net
  }
}
```

### Usage Guidelines

Use this command for IPv6 address aggregation.

Use the **set** form of this command to specify a contiguous block of IPv6 addresses to aggregate.

Use the **delete** form of this command to delete an aggregate address.

Use the **show** form of this command to display aggregate address configuration settings.

## protocols ripng default-information originate

Generates a default route into the RIPng routing domain.

### Syntax

```
set protocols ripng default-information originate
delete protocols ripng default-information originate
show protocols ripng default-information originate
```

### Command Default

A default route into the RIPng routing domain is not generated.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    default-information {
      originate
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to generate a default route into the RIPng routing domain.

Use the **delete** form of this command to restore the default behavior for default route generation into RIPng; that is, a default route is not generated.

Use the **show** form of this command to display the default configuration of route generation into RIPng.

## protocols ripng default-metric <metric>

Sets the default metric for external routes that are redistributed into RIPng.

### Syntax

**set** protocols ripng default-metric *metric*

**delete** protocols ripng default-metric

**show** protocols ripng default-metric

### Command Default

Routes that are imported into RIPng are assigned a metric of 1.

### Parameters

*metric*

Mandatory. A metric assigned to external routes that are imported into RIPng. The metric ranges from 1 through 16. The default metric is 1.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    default-metric metric
  }
}
```

### Usage Guidelines

Use the **set** form of this command to set the default metric for external routes that are redistributed into RIPng.

Use the **delete** form of this command to restore the default RIPng metric for external routes that are redistributed into RIPng; that is, routes are assigned a metric of 1.

Use the **show** form of this command to display the default metric for external routes that are redistributed into RIPng.

## protocols ripng log

Enables logging for RIPng.

### Syntax

```
set protocols ripng log { all | events| nsm| packet| rib}
delete protocols ripng log { all | events| nsm| packet | rib}
show protocols ripng log { all | events| nsm | packet| rib}
```

### Command Default

None

### Parameters

**all**  
Enables all RIPng logs.

**events**  
Enables RIPng events logs.

**nsm**  
Enables RIPng NSM logs.

**packet**  
Enables RIPng packet logs.

**rib**  
Enables RIPng RIB logs.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    log {
      all
      events
      nsm
      packet
      rib
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to enable routing information protocol (RIP)ng logs.

Use the **delete** form of this command to remove RIPng logs.

Use the **show** form of this command to view RIPng logs.

## protocols ripng log packet

Enables logging for RIPng packets.

### Syntax

```
set protocols ripng log packet { all | detail | rcv | send }
delete protocols ripng log packet { all | detail | rcv | send }
show protocols ripng log packet { all | detail | rcv | send }
```

### Command Default

None

### Parameters

**all**  
Enables all RIPng packet logs.

**detail**  
Enables only RIPng packet detail logs.

**rcv**  
Enables only RIPng packet receive logs.

**send**  
Enables only RIPng packet send logs.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    log {
      packet {
        all
        detail
        rcv
        send
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to enable routing information protocol (RIP)ng packet logs.

Use the **delete** form of this command to remove RIPng packet logs.

Use the **show** form of this command to view RIPng packet logs.

## protocols ripng passive-interface <interface-name>

Suppresses updates to RIPng routing on an interface.

### Syntax

```
set protocols ripng passive-interface interface-name
delete protocols ripng passive-interface interface-name
show protocols ripng passive-interface
```

### Command Default

RIPng routing updates are not suppressed.

### Parameters

*interface-name*

The identifier of an interface. Supported interface types are:

- Data plane
- Loopback

For more information about these interface types, refer to [Supported Interface Types](#) on page 59.

You can suppress routing updates on more than one RIPng interface by creating multiple **protocols ripng passive-interface** configuration nodes.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    passive-interface interface
  }
}
```

### Usage Guidelines

Use the **set** form of this command to suppress updates to RIPng routing on an interface.

Use the **delete** form of this command to disable the suppression of updates to RIPng routing on an interface.

Use the **show** form of this command to display the configuration of RIPng route suppression for an interface.

## protocols ripng route <ipv6net>

Sets a static route in RIPng.

### Syntax

**set** protocols ripng route *ipv6net*

**delete** protocols ripng route *ipv6net*

**show** protocols ripng route

### Parameters

*ipv6net*

Mandatory. The IPv6 network address defining the RIPng static route.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    route ipv6net
  }
}
```

### Usage Guidelines

Use this command to set a static route in RIPng.

Use the **set** form of this command to set a static route in RIPng.

Use the **delete** form of this command to remove an RIPng static route.

Use the **show** form of this command to display RIPng static route configuration.



## protocols ripng timers garbage-collection <seconds>

Sets the timer for RIPng garbage collection.

### Syntax

```
set protocols ripng timers garbage-collection seconds
delete protocols ripng timers garbage-collection [ seconds ]
show protocols ripng timers garbage-collection
```

### Command Default

RIPng garbage collection occurs at 120 seconds.

### Parameters

*seconds*

Mandatory. A timer interval in seconds. The interval ranges from 0 through 65535. The default interval is 120.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    timers {
      garbage-collection seconds
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to set the timer for RIPng garbage collection. When the timer expires, the system scans for stale RIPng resources and releases them for use.

Use the **delete** form of this command to restore the default timer interval for RIPng garbage collection, which is 120 seconds.

Use the **show** form of this command to display the current timer interval for RIPng garbage collection.

## protocols ripng timers timeout <seconds>

Sets the interval for RIPng timeouts.

### Syntax

```
set protocols ripng timers timeout seconds
delete protocols ripng timers timeout [ seconds ]
show protocols ripng timers timeout
```

### Command Default

RIPng timeouts occur at 180 seconds.

### Parameters

*seconds*

Mandatory. A timer interval in seconds. The interval ranges from 0 through 65535. The default interval is 180.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    timers {
      timeout seconds
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to set the interval for RIPng timeouts.

Use the **delete** form of this command to restore the default interval for RIPng time-outs, which is 180 seconds.

Use the **show** form of this command to display the current interval for RIPng time-outs.

## protocols ripng timers update <seconds>

Sets the timer interval for updates to the RIPng routing table.

### Syntax

```
set protocols ripng timers update seconds
delete protocols ripng timers update [ seconds ]
show protocols ripng timers update
```

### Command Default

The RIPng routing table is updated every 30 seconds.

### Parameters

*seconds*

Mandatory. An interval, in seconds, at which updates to the RIPng routing table occur. The interval ranges from 0 through 65535. The default interval is 30.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    timers {
      update seconds
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to set the timer interval for updates to the RIPng routing table. When the interval is shorter, the routing information in the tables is more accurate; however, more protocol network traffic occurs.

Use the **delete** form of this command to restore the default interval for RIPng updates, which is 30 seconds.

Use the **show** form of this command to display the current interval for RIPng updates.

## reset ipv6 ripng route

Resets data in the RIPng routing table.

### Syntax

```
reset ipv6 ripng route [ all | bgp | connected | kernel | ospfv6 | ripng | static | ip-address ]
```

### Parameters

**all**

Removes all entries from the RIPng routing table.

**bgp**

Removes only BGP routes from the RIPng routing table.

**connected**

Removes entries for connected routes from the RIPng routing table.

**kernel**

Removes kernel entries from the RIPng routing table.

**ospfv6**

Removes only OSPFv6 routes from the RIPng routing table.

**ripng**

Removes only RIPng routes from the RIPng routing table.

**static**

Removes static entries from the RIPng routing table.

*ip-address*

Removes entries that match *ip-address* (*x::x::x/M*), a destination IPv6 address, from the RIPng routing table.

### Modes

Operational mode.

### Usage Guidelines

Use the **reset ipv6 ripng route all** command to clear the RIPng routing table.

## show ipv6 route ripng

Displays all IPv6 RIPng routes.

### Syntax

```
show ipv6 route ripng
```

### Modes

Operational mode

### Usage Guidelines

Use this command to display all RIPng routes that are contained in the RIB.

### Examples

The following example shows all RIPng routes from the RIB.

```
vyatta@vyatta:~$show ipv6 route ripng
Codes: K - kernel route, C - connected, S - static, R - RIPng, O - OSPFv3,
       I - ISIS, B - BGP, * - FIB route.

R>* 2001:db8:2::/64 [120/2] via fe80::20c:29ff:fed6:816c, dp0s1, 00:43:00
R>* 2001:db8:3::/64 [120/3] via fe80::20c:29ff:fed6:816c, dp0s1, 00:00:03
vyatta@vyatta:~$
```

## show ipv6 ripng

Displays information about RIPng.

### Syntax

```
show ipv6 ripng [ interface | status ]
```

### Command Default

Displays all information about RIPng.

### Parameters

**interface**

Optional. Displays information for RIPng interfaces.

**status**

Optional. Displays only RIPng protocol status information.

### Modes

Operational mode

### Usage Guidelines

Use this command to display information about RIPng.

## Examples

The following example lists RIPng information.

```
vyatta@vyatta:~$ show ipv6 ripng
Codes: R - RIPng, C - connected, S - Static, O - OSPF, B - BGP
Sub-codes:
  (n) - normal, (s) - static, (d) - default, (r) - redistribute,
  (i) - interface, (a/S) - aggregated/Suppressed

  Network      Next Hop          Via      Metric Tag Time
C(i) 2001:db8:1::/64
      ::          self        1      0
R(n) 2001:db8:2::/64
      fe80::20c:29ff:fed6:816c  dp0s1    2      0 02:56
R(n) 2001:db8:3::/64
      fe80::20c:29ff:fed6:816c  dp0s1    3      0 02:56
vyatta@vyatta:~$
```

The following example lists RIPng protocol status information.

```
vyatta@vyatta:~$ show ipv6 ripng status
Routing Protocol is "RIPng"
Sending updates every 30 seconds with +/-50%, next due in 4 seconds
Timeout after 180 seconds, garbage collect after 120 seconds
Outgoing update filter list for all interface is not set
Incoming update filter list for all interface is not set
Default redistribution metric is 1
Redistributing:
  Interface
  dp0s1
```





# Route Redistribution Commands

---

- protocols ripng redistribute bgp.....42
- protocols ripng redistribute connected.....43
- protocols ripng redistribute kernel.....44
- protocols ripng redistribute ospfv3.....45
- protocols ripng redistribute static.....46

## protocols ripng redistribute bgp

Redistributes BGP routes into RIPng routing tables.

### Syntax

```
set protocols ripng redistribute bgp [ metric metric | route-map map-name ]
```

```
delete protocols ripng redistribute bgp [ metric | route-map ]
```

```
show protocols ripng redistribute bgp [ metric | route-map ]
```

### Command Default

BGP routes that are redistributed into RIPng are assigned a routing metric of 1. By default, no route map is applied to redistributed BGP routes.

### Parameters

*metric*

Applies a metric to BGP routes that are imported into RIPng routing tables. The metric ranges from 1 through 16. The default metric is 1.

**route-map** *map-name*

Applies a route map to BGP routes that are imported into RIPng routing tables.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    redistribute {
      bgp {
        metric metric
        route-map map-name
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to redistribute BGP routes into RIPng routing tables. You can set the routing metric for or specify a route map to apply to redistributed BGP routes.

Use the **delete** form of this command to remove the current configuration of BGP route redistribution.

Use the **show** form of this command to display the current configuration of BGP route redistribution.

## protocols ripng redistribute connected

Redistributes directly connected routes into RIPng routing tables.

### Syntax

**set protocols ripng redistribute connected** [ *metric* *metric* | **route-map** *map-name* ]

**delete protocols ripng redistribute connected** [ *metric* | **route-map** ]

**show protocols ripng redistribute connected** [ *metric* | **route-map** ]

### Command Default

Connected routes that are redistributed into RIPng are assigned a routing metric of 1. By default, no route map is applied to redistributed connected routes.

### Parameters

*metric*

Optional. The routing metric to be applied to connected routes being imported into RIPng routing tables. The range is 1 to 16. The default is 1.

*map-name*

Optional. Applies the specified route map to connected routes being imported into RIPng routing tables.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    redistribute {
      connected {
        metric metric
        route-map map-name
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to redistribute directly connected routes into RIPng routing tables. You can set the routing metric for or specify a route map to apply to directly connected BGP routes.

Use the **delete** form of this command to remove the current configuration of directly connected route redistribution.

Use the **show** form of this command to display the current configuration of directly connected route redistribution.

## protocols ripng redistribute kernel

Redistributes kernel routes into RIPng routing tables.

### Syntax

**set protocols ripng redistribute kernel** [ **metric** *metric* | **route-map** *map-name* ]

**delete protocols ripng redistribute kernel** [ **metric** | **route-map** ]

**show protocols ripng redistribute kernel** [ **metric** | **route-map** ]

### Command Default

Kernel routes that are redistributed into RIPng are assigned a routing metric of 1. By default, no route map is applied to redistributed kernel routes.

### Parameters

*metric*

Optional. The routing metric to be applied to kernel routes being imported into RIPng routing tables. The range is 1 to 16. The default is 1.

*map-name*

Optional. Applies the specified route map to kernel routes being imported into RIPng routing tables.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    redistribute {
      kernel {
        metric metric
        route-map map-name
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to redistribute kernel routes into RIPng routing tables. You can set the routing metric for or specify a route map to apply to redistributed kernel routes.

Use the **delete** form of this command to remove the current configuration of kernel route redistribution.

Use the **show** form of this command to display the current configuration of kernel route redistribution.

## protocols ripng redistribute ospfv3

Redistributes OSPFv3 routes into RIPng routing tables.

### Syntax

```
set protocols ripng redistribute ospfv3 [ metric metric | route-map map-name ]
```

```
delete protocols ripng redistribute ospfv3 [ metric | route-map ]
```

```
show protocols ripng redistribute ospfv3 [ metric | route-map ]
```

### Command Default

OSPFv3 routes that are redistributed into RIPng are assigned a routing metric of 1. By default, no route map is applied to redistributed OSPFv3 routes.

### Parameters

*metric*

Optional. The routing metric to be applied to OSPFv3 routes being imported into RIPng routing tables. The range is 1 to 16. The default is 1.

*map-name*

Optional. Applies the specified route map to OSPFv3 routes being imported into RIPng routing tables.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    redistribute {
      ospfv3 {
        metric metric
        route-map map-name
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to redistribute OSPFv3 routes into RIPng routing tables. You can set the routing metric for or specify a route map to apply to redistributed OSPFv3 routes.

Use the **delete** form of this command to remove the current configuration of OSPFv3 route redistribution.

Use the **show** form of this command to display the current configuration of OSPFv3 route redistribution.

## protocols ripng redistribute static

Redistributes static routes into RIPng routing tables.

### Syntax

**set protocols ripng redistribute static** [ *metric metric* | *route-map map-name* ]

**delete protocols ripng redistribute static** [ *metric* | *route-map* ]

**show protocols ripng redistribute static** [ *metric* | *route-map* ]

### Command Default

Static routes that are redistributed into RIPng are assigned a routing metric of 1. By default, no route map is applied to redistributed static routes.

### Parameters

*metric*

Optional. The routing metric to be applied to static routes being imported into RIPng routing tables. The range is 1 to 16. The default is 1.

*map-name*

Optional. Applies the specified route map to static routes being imported into RIPng routing tables.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    redistribute {
      static {
        metric metric
        route-map map-name
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to redistribute static routes into RIPng routing tables. You can set the routing metric for or specify a route map to apply to redistributed static routes.

Use the **delete** form of this command to remove the current configuration of static route redistribution.

Use the **show** form of this command to display the current configuration of static route redistribution.

# Route Filtering Commands

---

- protocols ripng distribute-list access-list.....48
- protocols ripng distribute-list interface <interface-name> access-list.....49
- protocols ripng distribute-list interface <interface-name> prefix-list.....50
- protocols ripng distribute-list prefix-list.....51

## protocols ripng distribute-list access-list

Applies an access list to filter inbound or outbound RIPng packets.

### Syntax

```
set protocols ripng distribute-list access-list { in in-list | out out-list }
```

```
delete protocols ripng distribute-list access-list { in | out }
```

```
show protocols ripng distribute-list access-list { in | out }
```

### Parameters

*in-list*

Specifies the identifier of a defined access list. The access list filters inbound RIPng packets.

*out-list*

Specifies the identifier of a defined access list. The access list filters outbound RIPng packets.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    distribute-list {
      access-list {
        in in-list
        out out-list
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to apply an access list to filter inbound or outbound RIPng packets.

Use the **delete** form of this command to remove the filtering of RIPng inbound or outbound packets by an access list.

Use the **show** form of this command to display RIPng access list filtering configuration.



## protocols ripng distribute-list interface <interface-name> access-list

Applies an access list to an interface to filter inbound or outbound RIPng packets.

### Syntax

**set** protocols ripng distribute-list interface *interface-name* access-list { in *in-list* | out *out-list* }

**delete** protocols ripng distribute-list interface *interface-name* access-list { in | out }

**show** protocols ripng distribute-list interface *interface-name* access-list { in | out }

### Parameters

*interface-name*

The identifier of an interface. Supported interface types are:

- Data plane
- Loopback

For more information about these interface types, refer to [Supported Interface Types](#) on page 59.

**in** *in-list*

Specifies the identifier of a defined access list. The access list applies to the specified interface to filter inbound RIPng packets.

**out** *out-list*

Specifies the identifier of a defined access list. The access list applies to the specified interface to filter outbound RIPng packets.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    distribute-list {
      interface interface-name {
        access-list {
          in in-list
          out out-list
        }
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to apply an access list to a specific interface to filter inbound or outbound RIPng packets.

Use the **delete** form of this command to remove the filtering of RIPng inbound or outbound packets on an interface by an access list.

Use the **show** form of this command to display RIPng access list filtering configuration for an interface.

## protocols ripng distribute-list interface <interface-name> prefix-list

Applies a prefix list to an interface to filter inbound or outbound RIPng packets.

### Syntax

**set** protocols ripng distribute-list interface *interface-name* prefix-list { in *in-list* | out *out-list* }

**delete** protocols ripng distribute-list interface *interface-name* prefix-list { in | out }

**show** protocols ripng distribute-list interface *interface-name* prefix-list { in | out }

### Parameters

*interface-name*

The identifier of an interface. Supported interface types are:

- Data plane
- Loopback

For more information about these interface types, refer to [Supported Interface Types](#) on page 59.

**in** *in-list*

Specifies the identifier of a defined prefix list. The prefix list applies to the specified interface to filter inbound RIPng packets.

**out** *out-list*

Specifies the identifier of a defined prefix list. The prefix list applies to the specified interface to filter outbound RIPng packets.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    distribute-list {
      interface interface-name {
        prefix-list {
          in in-list
          out out-list
        }
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to apply a prefix list to an interface to filter inbound or outbound RIPng packets.

Use the **delete** form of this command to remove the filtering of RIPng inbound or outbound packets on an interface by a prefix list.

Use the **show** form of this command to display RIPng prefix list filtering configuration for an interface.

## protocols ripng distribute-list prefix-list

Applies a prefix list to filter inbound or outbound RIPng packets.

### Syntax

```
set protocols ripng distribute-list prefix-list { in in-list | out out-list }
```

```
delete protocols ripng distribute-list prefix-list { in | out }
```

```
show protocols ripng distribute-list prefix-list { in | out }
```

### Parameters

**in** *in-list*

Specifies the identifier of a defined prefix list. The prefix list filters inbound RIPng packets.

**out** *out-list*

Specifies the identifier of a defined prefix list. The prefix list filters outbound RIPng packets.

### Modes

Configuration mode

### Configuration Statement

```
protocols {
  ripng {
    distribute-list {
      prefix-list {
        in in-list
        out out-list
      }
    }
  }
}
```

### Usage Guidelines

Use the **set** form of this command to apply a prefix list to filter inbound or outbound RIPng packets.

Use the **delete** form of this command to remove the filtering of RIPng inbound or outbound packets by a prefix list.

Use the **show** form of this command to display RIPng prefix list filtering configuration.



# RIPng Interface Commands

---

- interfaces <interface> ipv6 ripng enable..... 54
- interfaces <interface> ipv6 ripng metric-offset..... 55
- interfaces <interface> ipv6 ripng split-horizon..... 56
- interfaces <interface> ipv6 ripng neighbor <ip-address>..... 58

## interfaces <interface> ipv6 ripng enable

Enables RIPng on an interface.

### Syntax

**set interfaces** *interface* ipv6 ripng enable

**delete interfaces** *interface* ipv6 ripng enable

**show interfaces** *interface* ipv6 ripng

### Parameters

*interface*

Mandatory. A type of interface. For detailed keywords and arguments that can be specified as interface types, refer to [Supported Interface Types](#) on page 59.

### Modes

Configuration mode

### Configuration Statement

```
interfaces interface {  
    ipv6 {  
        ripng  
    }  
}
```

### Usage Guidelines

Use this command to enable RIPng.

Use the **set** form of this command to enable RIPng on an interface.

Use the **delete** form of this command to remove all RIPng configuration and disable RIPng on the interface.

Use the **show** form of this command to display the current RIPng configuration on an interface.

## interfaces <interface> ipv6 ripng metric-offset

Sets a metric to add to routes that are received from RIPng on an interface.

### Syntax

**set interfaces** *interface* **ipv6 ripng metric-offset** *metric*

**show interfaces** *interface* **ipv6 ripng metric-offset**

### Parameters

*interface*

Mandatory. A type of interface. For detailed keywords and arguments that can be specified as interface types, refer to [Supported Interface Types](#) on page 59.

*metric*

Mandatory. A metric to be added to the routes over the interface. The metric ranges from 1 through 16.

### Modes

Configuration mode

### Configuration Statement

```
interfaces interface {
  ipv6 {
    ripng {
      metric-offset metric
    }
  }
}
```

### Usage Guidelines

Use this command to set the metric for inbound and outbound routes on an interface that are beyond the normal operation of RIPng.

Use the **set** form of this command to set a metric to add to routes that are received from RIPng on an interface.

Use the **show** form of this command to display the current metric that is added to routes that are received from RIPng on an interface.

## interfaces <interface> ipv6 ripng split-horizon

Configures split-horizon and split-horizon poison-reverse on an interface that is running RIPng.

### Syntax

**set interfaces** *interface* ipv6 ripng split-horizon [ **disable** | **poison-reverse** ]

**show interfaces** *interface* ipv6 ripng split-horizon

### Command Default

Split-horizon is enabled.

### Parameters

*interface*

Mandatory. A type of interface. For detailed keywords and arguments that can be specified as interface types, refer to [Supported Interface Types](#) on page 59.

**disable**

Disables split-horizon on the specified interface.

**poison-reverse**

Enables poison-reverse on the specified interface.

### Modes

Configuration mode

### Configuration Statement

```
interfaces interface {
  ipv6 {
    ripng {
      split-horizon {
        disable
        poison-reverse
      }
    }
  }
}
```

### Usage Guidelines

Use this command to disable split-horizon or enable split-horizon poison-reverse on an interface that is running RIPng.

Split-horizon is a stability feature that reduces the possibility of network loops, particularly when links become disconnected. It stops an interface from including in its network updates to any routes that it learned from that interface. Split-horizon is effective at preventing loops between routers that are directly connected to each other, and it speeds convergence when network conditions change. Split-horizon is the default setting in RIPng.

Poison-reverse is a variation of split-horizon. When an interface that has poison-reverse enabled detects a link that is down, it increases the metric for that route to 16 and propagates that information in its next update. Because 15 is the largest number of hops that can be reached on a RIPng network, increasing the metric to 16 renders the route unreachable as far as downstream



RIPng routers are concerned. This is called "poisoning" the route. Poison-reverse is useful for propagating information about bad routes to routers that are downstream but not immediate neighbors, where split-horizon is ineffective.

When this option is enabled, the router includes the route in announcements to the neighbor from which it was learned. When this option is disabled, the router omits the route from announcements to the neighbor from which it was learned.

Use the **set** form of this command to configure split-horizon and split-horizon poison-reverse on an interface that is running RIPng.

Use the **show** form of this command to display the current configuration of split-horizon.

## interfaces <interface> ipv6 ripng neighbor <ip-address>

Configures the IPv6 link-local address of a neighbor for RIPng.

### Syntax

**set interfaces** *interface* **ipv6 ripng neighbor** *ip-address*

**show interface** *interface* **ipv6 ripng neighbor**

### Parameters

*interface*

A type of interface. For detailed keywords and arguments that can be specified as interface types, refer to [Supported Interface Types](#) on page 59.

*ip-address*

The IPv6 link-local address of a neighbor.

### Modes

Configuration mode.

### Configuration Statement

```
interfaces interface {
    address address {
        ipv6 {
            ripng {
                neighbor ip-address
            }
        }
    }
}
```

### Usage Guidelines

Use the **set** form of this command to configure the IPv6 link-local address of a neighbor for RIPng.

Use the **show** form of this command to display the IPv6 link-local address of the neighbor.

# Supported Interface Types

The following table shows the syntax and parameters of supported interface types. Depending on the command, some of these types may not apply.

Interface Type	Syntax	Parameters
Bridge	<b>bridge</b> <i>brx</i>	<i>brx</i> : The name of a bridge group. The name ranges from br0 through br999.
Data plane	<b>dataplane</b> <i>interface-name</i>	<p><i>interface-name</i>: The name of a data plane interface. Following are the supported formats of the interface name:</p> <ul style="list-style-type: none"> <li>• <b>dp<i>x</i>p<i>y</i>p<i>z</i></b>—The name of a data plane interface, where           <ul style="list-style-type: none"> <li>— <b>dp<i>x</i></b> specifies the data plane identifier (ID). Currently, only dp0 is supported.</li> <li>— <b>p<i>y</i></b> specifies a physical or virtual PCI slot index (for example, p129).</li> <li>— <b>p<i>z</i></b> specifies a port index (for example, p1). For example, dp0p1p2, dp0p16Op1, and dp0p192p1.</li> </ul> </li> <li>• <b>dp<i>x</i>em<i>y</i></b>—The name of a data plane interface on a LAN-on-motherboard (LOM) device that does not have a PCI slot, where <b>em<i>y</i></b> specifies an embedded network interface number (typically, a small number). For example, dp0em3.</li> <li>• <b>dp<i>x</i>s<i>y</i></b>—The name of a data plane interface on a device that is installed on a virtual PCI slot, where <b>xs<i>y</i></b> specifies an embedded network interface number (typically, a small number). For example, dp0s2.</li> <li>• <b>dp<i>x</i>P<i>n</i>p<i>y</i>p<i>z</i></b>—The name of a data plane interface on a device that is installed on a secondary PCI bus, where <b>P<i>n</i></b> specifies the bus number. You can use this format to name data plane interfaces on large physical devices with multiple PCI buses. For these devices, it is possible to have network interface cards installed on different buses with these cards having the same slot ID. The value of <i>n</i> must be an integer greater than 0. For example, dp0P1p162p1 and dp0P2p162p1.</li> </ul>
Data plane vif	<b>dataplane</b> <i>interface-name</i> <b>vif</b> <i>vif-id</i> [ <b>vlan</b> <i>vlan-id</i> ]	<p><i>interface-name</i>: Refer to the preceding description.</p> <p><i>vif-id</i>: A virtual interface ID. The ID ranges from 1 through 4094.</p> <p><i>vlan-id</i>: The VLAN ID of a virtual interface. The ID ranges from 1 through 4094.</p>
Loopback	<b>loopback</b> <i>lo</i> or <b>loopback</b> <i>lo</i> <i>n</i>	<i>n</i> : The name of a loopback interface, where <i>n</i> ranges from 1 through 99999.
OpenVPN	<b>openvpn</b> <i>vtunx</i>	<i>vtunx</i> : The identifier of an OpenVPN interface. The identifier ranges from vtun0 through vtun <i>x</i> , where <i>x</i> is a nonnegative integer.
Tunnel	<b>tunnel</b> <i>tunx</i> or <b>tunnel</b> <i>tunx</i> <b>parameters</b>	<i>tunx</i> : The identifier of a tunnel interface you are defining. The identifier ranges from tun0 through tun <i>x</i> , where <i>x</i> is a nonnegative integer.

Interface Type	Syntax	Parameters
Virtual tunnel	<b>vti</b> <i>vtix</i>	<p><i>vtix</i>: The identifier of a virtual tunnel interface you are defining. The identifier ranges from vti0 through vti<i>x</i>, where <i>x</i> is a nonnegative integer.</p> <p><b>Note:</b> This interface does not support IPv6.</p>
VRRP	<i>parent-interface</i> <b>vrrp</b> <b>vrrp-group</b> <i>group</i>	<p><i>parent-interface</i>: The type and identifier of a parent interface; for example, data plane dpOp1p2 or bridge br999.</p> <p><i>group</i>: A VRRP group identifier.</p> <p>The name of a VRRP interface is not specified. The system internally constructs the interface name from the parent interface identifier plus the VRRP group number; for example, dpOp1p2v99. Note that VRRP interfaces support the same feature set as does the parent interface.</p>

# List of Acronyms

---

Acronym	Description
ACL	access control list
ADSL	Asymmetric Digital Subscriber Line
AH	Authentication Header
AMI	Amazon Machine Image
API	Application Programming Interface
AS	autonomous system
ARP	Address Resolution Protocol
AWS	Amazon Web Services
BGP	Border Gateway Protocol
BIOS	Basic Input Output System
BPDU	Bridge Protocol Data Unit
CA	certificate authority
CCMP	AES in counter mode with CBC-MAC
CHAP	Challenge Handshake Authentication Protocol
CLI	command-line interface
DDNS	dynamic DNS
DHCP	Dynamic Host Configuration Protocol
DHCPv6	Dynamic Host Configuration Protocol version 6
DLCI	data-link connection identifier
DMI	desktop management interface
DMVPN	dynamic multipoint VPN
DMZ	demilitarized zone
DN	distinguished name
DNS	Domain Name System
DSCP	Differentiated Services Code Point
DSL	Digital Subscriber Line
eBGP	external BGP
EBS	Amazon Elastic Block Storage
EC2	Amazon Elastic Compute Cloud
EGP	Exterior Gateway Protocol
ECMP	equal-cost multipath
ESP	Encapsulating Security Payload
FIB	Forwarding Information Base
FTP	File Transfer Protocol
GRE	Generic Routing Encapsulation
HDLC	High-Level Data Link Control
I/O	Input/Output
ICMP	Internet Control Message Protocol

Acronym	Description
IDS	Intrusion Detection System
IEEE	Institute of Electrical and Electronics Engineers
IGMP	Internet Group Management Protocol
IGP	Interior Gateway Protocol
IPS	Intrusion Protection System
IKE	Internet Key Exchange
IP	Internet Protocol
IPOA	IP over ATM
IPsec	IP Security
IPv4	IP Version 4
IPv6	IP Version 6
ISAKMP	Internet Security Association and Key Management Protocol
ISM	Internet Standard Multicast
ISP	Internet Service Provider
KVM	Kernel-Based Virtual Machine
L2TP	Layer 2 Tunneling Protocol
LACP	Link Aggregation Control Protocol
LAN	local area network
LDAP	Lightweight Directory Access Protocol
LLDP	Link Layer Discovery Protocol
MAC	medium access control
mGRE	multipoint GRE
MIB	Management Information Base
MLD	Multicast Listener Discovery
MLPPP	multilink PPP
MRRU	maximum received reconstructed unit
MTU	maximum transmission unit
NAT	Network Address Translation
NBMA	Non-Broadcast Multi-Access
ND	Neighbor Discovery
NHRP	Next Hop Resolution Protocol
NIC	network interface card
NTP	Network Time Protocol
OSPF	Open Shortest Path First
OSPFv2	OSPF Version 2
OSPFv3	OSPF Version 3
PAM	Pluggable Authentication Module
PAP	Password Authentication Protocol
PAT	Port Address Translation
PCI	peripheral component interconnect
PIM	Protocol Independent Multicast
PIM-DM	PIM Dense Mode

Acronym	Description
PIM-SM	PIM Sparse Mode
PKI	Public Key Infrastructure
PPP	Point-to-Point Protocol
PPPoA	PPP over ATM
PPPoE	PPP over Ethernet
PPTP	Point-to-Point Tunneling Protocol
PTMU	Path Maximum Transfer Unit
PVC	permanent virtual circuit
QoS	quality of service
RADIUS	Remote Authentication Dial-In User Service
RHEL	Red Hat Enterprise Linux
RIB	Routing Information Base
RIP	Routing Information Protocol
RIPng	RIP next generation
RP	Rendezvous Point
RPF	Reverse Path Forwarding
RSA	Rivest, Shamir, and Adleman
Rx	receive
S3	Amazon Simple Storage Service
SLAAC	Stateless Address Auto-Configuration
SNMP	Simple Network Management Protocol
SMTP	Simple Mail Transfer Protocol
SONET	Synchronous Optical Network
SPT	Shortest Path Tree
SSH	Secure Shell
SSID	Service Set Identifier
SSM	Source-Specific Multicast
STP	Spanning Tree Protocol
TACACS+	Terminal Access Controller Access Control System Plus
TBF	Token Bucket Filter
TCP	Transmission Control Protocol
TKIP	Temporal Key Integrity Protocol
ToS	Type of Service
TSS	TCP Maximum Segment Size
Tx	transmit
UDP	User Datagram Protocol
VHD	virtual hard disk
vif	virtual interface
VLAN	virtual LAN
VPC	Amazon virtual private cloud
VPN	virtual private network
VRRP	Virtual Router Redundancy Protocol

Acronym	Description
WAN	wide area network
WAP	wireless access point
WPA	Wired Protected Access